
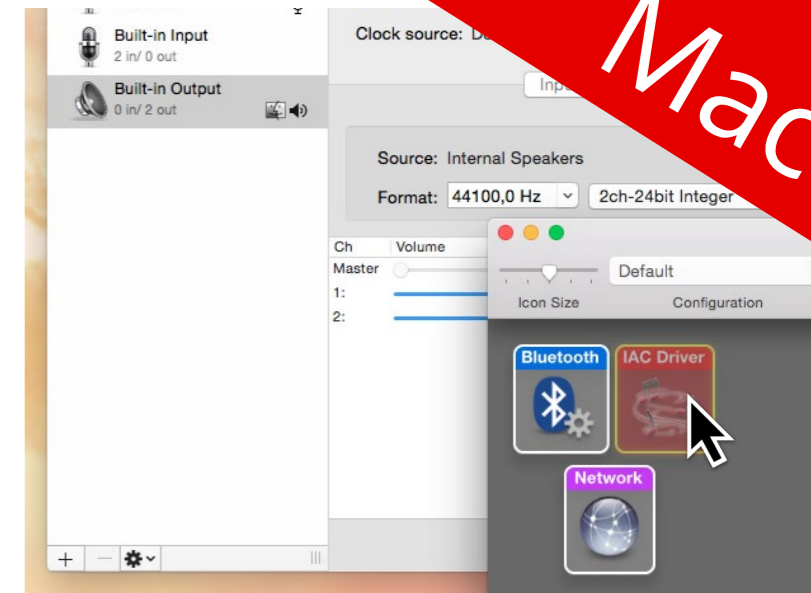
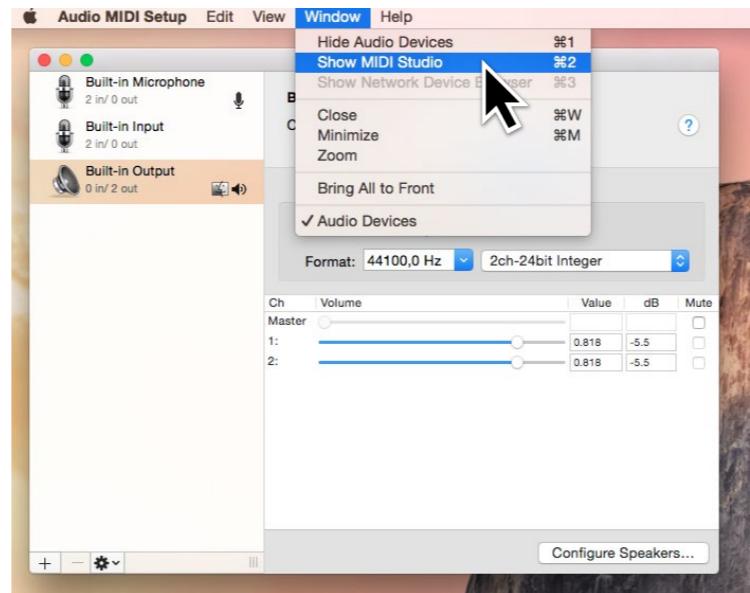


# How to setup AutoTonic?

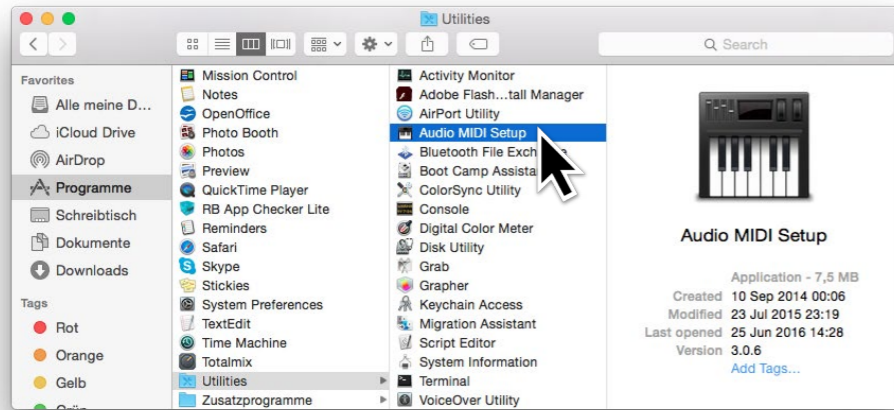


Mac

① On Mac OS X, open the **Applications** folder on your hard drive, then open the **Utilities** folder and double-click the **Audio MIDI Setup** icon.

② In **Audio MIDI Setup**, select **Window** then **Show MIDI Studio** or press ⌘2



③ In **MIDI Studio** double click on **IAC Driver** to open it.

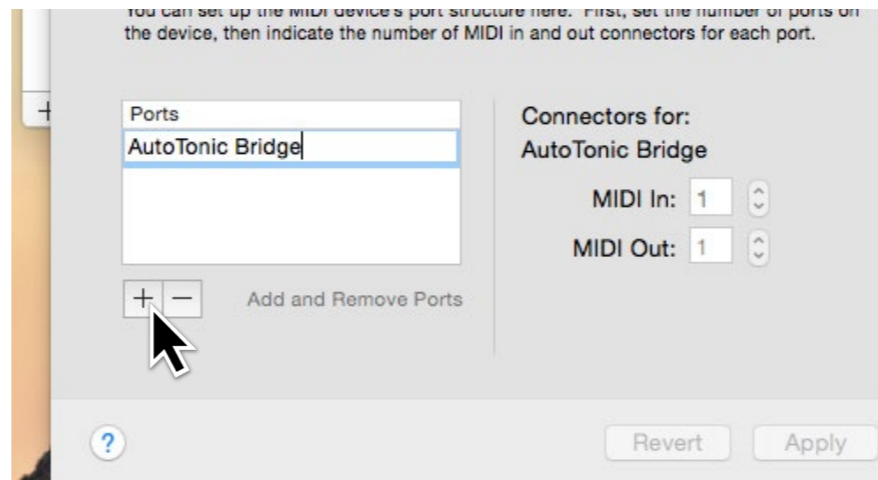

④ Now you should see a new window called **IAC Driver Properties**. To start using the IAC Driver, make sure it's  **Device is online** (check box).

⑤ In the same window under **Ports** give your new *virtual MIDI port* a useful name like: 'AutoTonic Bridge' by double-clicking on the text.

⑥ Then apply and close the **Audio MIDI Setup**. Now start **AutoTonic** and press the **MIDI I/O** button.

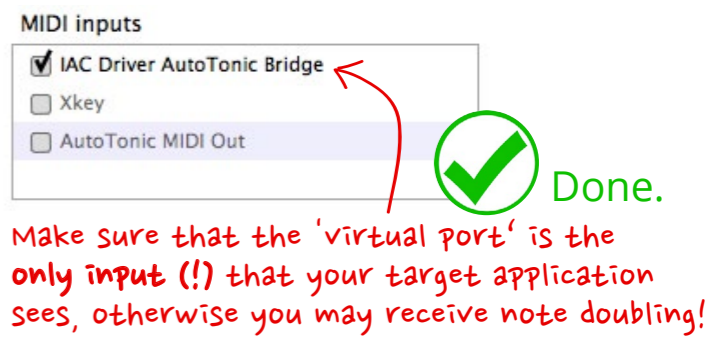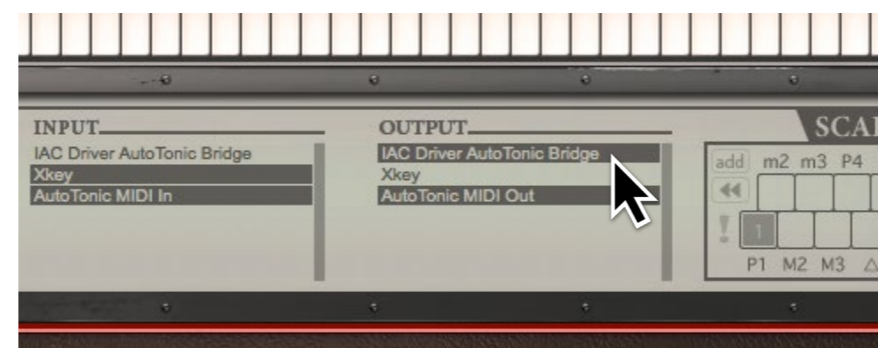

⑦ It will show you the **INPUT** ports available on your system. Select the device(s) you want to use.

⑧ In the **OUTPUT** section select your virtual IAC MIDI port (AutoTonic Bridge).

⑨ The **last step** is to define 'AutoTonic Bridge' as **input** in the **target application** you're going to use.

Make sure that the 'virtual port' is the **only input (!)** that your target application sees, otherwise you may receive note doubling!